


Coyote DTC4/DTC6


Verbindingsmoffen/closures




DTC4 - 2 grommets per end

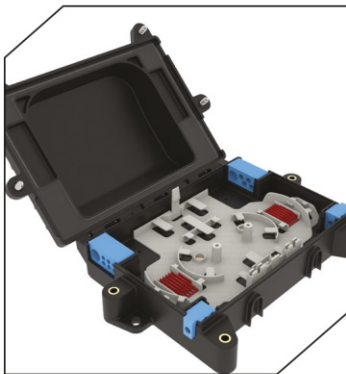

DTC4 - Splice only

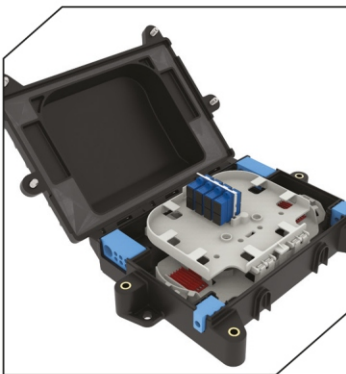

DTC4 - Splice + Bulkhead

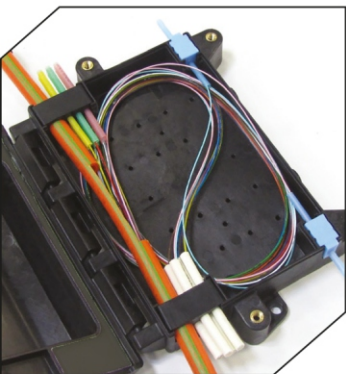

DTC4 - Duct Transition


Description

Identifying closure systems to protect the final connection point in your FTTH network is critical. Selecting one packed with features to support splicing, connectivity or ducting applications, using traditional cable, blown fiber, pushable drop cable technology or microtube cable, with a footprint slightly larger than a splice tray, has been impossible; until now.


The COYOTE DTC4 and DTC6 are the latest additions to the DTC (Drop Termination Closure) Family. Like the original DTC, these closures offer a durable, compact solution with multiple internal fiber organizers to support your current and future needs. Network evolution is unpredictable so why not choose a closure system developed to adapt.

Key Features:


- **Size:** 10.8" x 7.8" x 13.2"
(274 x 198 x 82 mm)
- **Max Splice Capacity:** 24
- **Max Adapter Capacity:** See table for adapter options
- **Grommet Quantity:** 4 or 6 – See table for grommet options
- Flexible grommet sealing system supports a wide range of flat or round cable profiles
- Factory installed sealing materials
- Reenterable and reusable
- Designed to GR-771 Generic Requirements for Fiber Splice Closures
- Flame Retardant
- **Applications:**
 - DTC4 - IP-68 rated
 - Aerial, below grade, direct buried, pole mount or interior applications
 - DTC6 - IP-68 rated
 - Aerial, below grade, direct buried, pole mount or interior applications

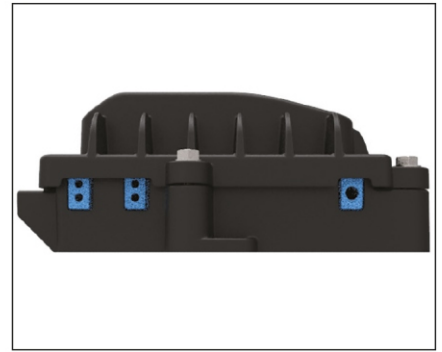


DTC6 - 3 grommets per end

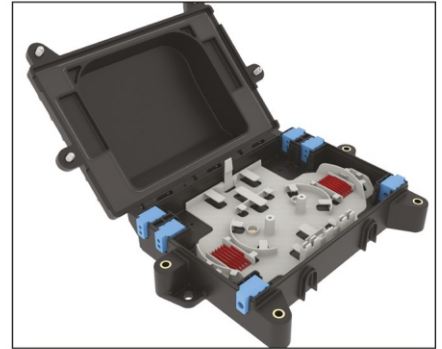

DTC6 - Splice only

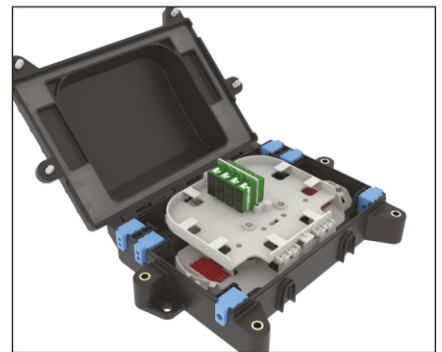


DTC6 - Splice + Bulkhead

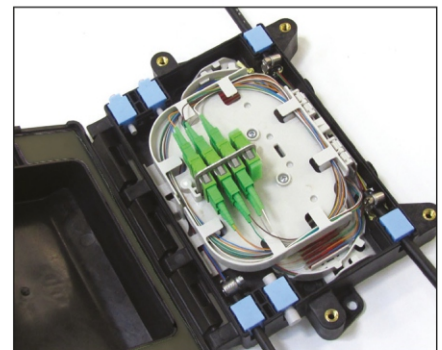









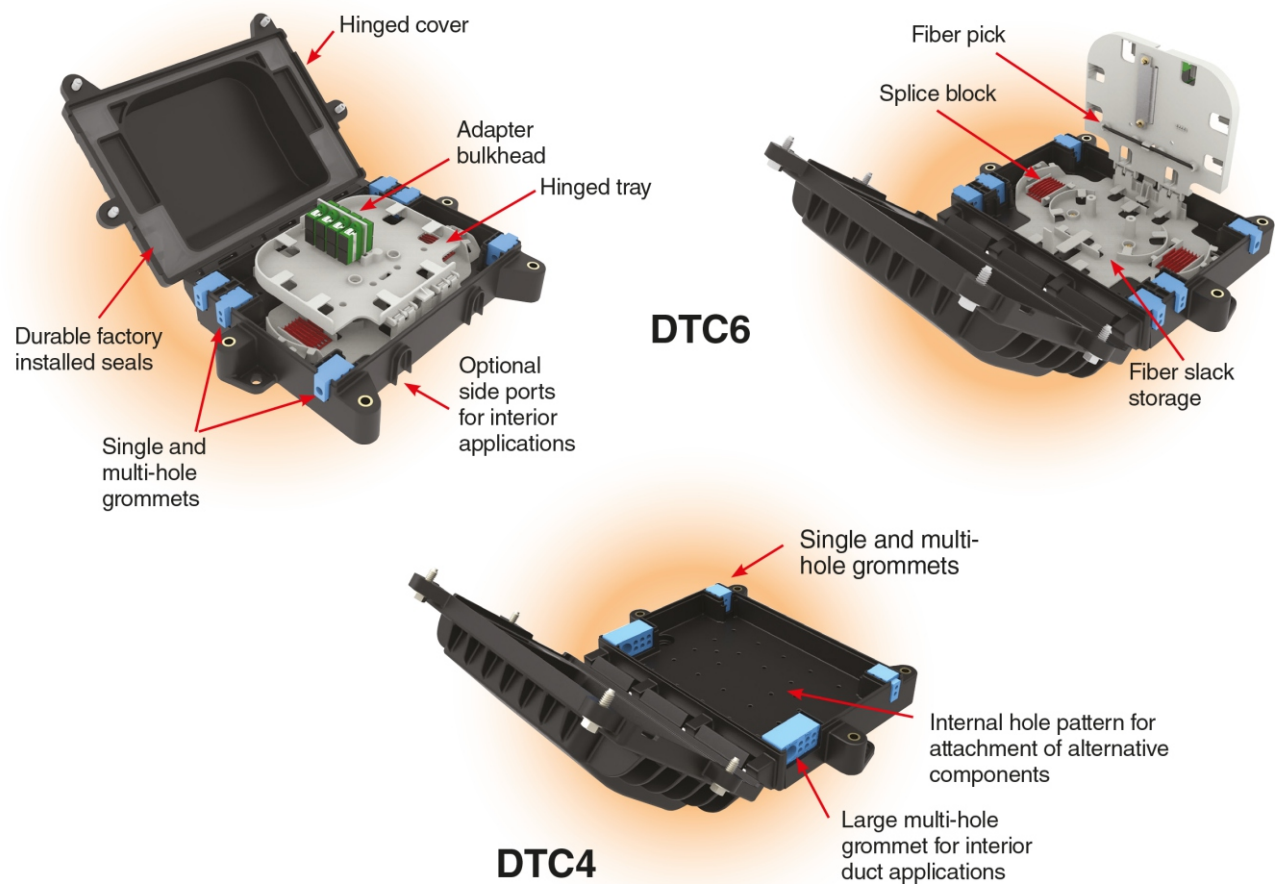





DTC6 - Splice + Bulkhead

Coyote DTC4/DTC6

Verbindingsmoffen/closures



Bestelopties:

Large Grommet Select 2		Cable Diameter Range	Branch / Drop Grommet Select 2		Cable Diameter Range	Organizer Options Select 1		Adapter Type Select 1	
A		5 Hole Design 1 Hole -.55" - .60" (14 - 15 mm) 4 Holes -.275" (7 mm)	A		SOLID / PLUG	N	NONE	N	None
B		7 Hole Design 1 Hole -.55" - .60" (14 - 15 mm) 6 Holes -.197" (5 mm)	B		.170" - .250" (4.3 - 6.4 mm) ROUND DROP CABLES	1	 Splice Only	1	 Dual SCAPC
			C		.250" - .350" (6.4 - 8.9 mm) ROUND DROP CABLES			2	 Dual SCUPC
			D		.156" - .170" (4.0 - 4.3 mm) ROUND DROP CABLES	2	 Splice + Adapters	3	 Quad LCAPC
			E		.093" - .125" (2.4 - 3.2 mm) ROUND DROP CABLES			4	 Quad LCUPC
			F		FLAT DROP CABLES				

Accessoires:

DTC4/6 Pole/Wall mount Bracket
DTC4/6 Cable Storage Bracket kit
DTC4/6/8 Aerial Strand Bracket
DTC4/6/8 ADSS Bracket